

# CHARGEURS PCC

FASHION TECHNOLOGIES

LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

## 1506/15


<b>CONSTRUCTION</b>	Weft inserted
<b>COMPOSITION</b>	30.0 % Polyester 70.0 % Viscose
<b>COATING</b>	Polyamide - 17 mesh
<b>WEIGHT</b>	60.0 gr/m <sup>2</sup>
<b>WIDTH</b>	150 cms
<b>COLOURS</b>	Natural , TTN , White , Black

### APPLICATION

Blouses  
Dresses  
Jackets - Blazers  
Pants - Skirts

### WOMENS AND MENS WEAR

### CARE INSTRUCTIONS

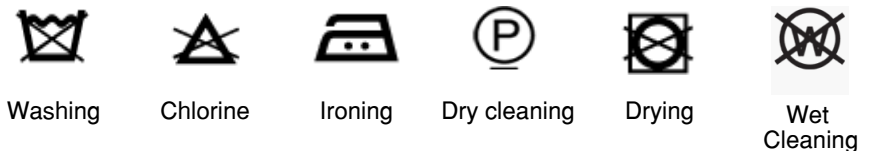

	Fusing Conditions	
 Glueline temperature	121/127 C	121/127 C
	200/400 gr/cm	2/4 bar
	12/15 s	12/15 s

In view of the wide variety of existing fabrics and other materials used by the clothing industry, Lainière de Picardie recommends that before industrial use, complete tests are carried out with the fabrics and other materials to be used, and on the machines that will be used. Lainière de Picardie guarantee is, explicitly limited to the replacement of any of its products recognised to be defective, to the exclusion of all other compensation or damages.



Class II



AMERICAS · EUROPE · MIDDLE EAST · AFRICA · ASIA PACIFIC

www.chargeurs-pcc.com