

CHARGEURS PCC

FASHION TECHNOLOGIES

LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

2495/A23


CONSTRUCTION Weft inserted
COMPOSITION 100.0 % Polyester
COATING Polyamide - 23 mesh
WEIGHT 58 gr/m²
WIDTH 150 cms
COLOURS Natural , Black , White

APPLICATION

Special applications
Special washes
Garment dye
Reinforcement

WOMENS AND MENS WEAR

CARE INSTRUCTIONS

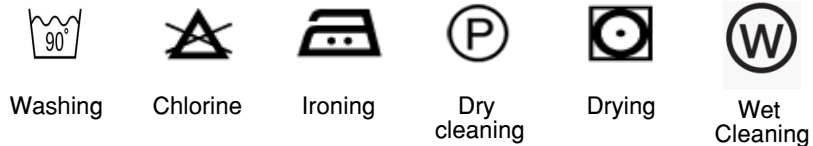

	Fusing Conditions	
 Glueline temperature	143/154 C	143/154 C
 300/400 gr/cm	300/400 gr/cm	3/4 bar
 12/15 s	12/15 s	12/15 s

In view of the wide variety of existing fabrics and other materials used by the clothing industry, Lainière de Picardie recommends that before industrial use, complete tests are carried out with the fabrics and other materials to be used, and on the machines that will be used. Lainière de Picardie guarantee is, explicitly limited to the replacement of any of its products recognised to be defective, to the exclusion of all other compensation or damages.



Class I

AMERICAS · EUROPE · MIDDLE EAST · AFRICA · ASIA PACIFIC

www.chargeurs-pcc.com