

CHARGEURS PCC


FASHION TECHNOLOGIES

LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS

3525/817

CONSTRUCTION	Thermal
COMPOSITION	50.0 % Polyester 50.0 % Polyamide
COATING	Polyamide - 17 mesh
WEIGHT	35.0 gr/m ²
WIDTH	150 cms
COLOURS	White , Grey (nw) , Black , Charcoal (nw)
DOPE DYED	
COLOR DOT	
APPLICATION	Waistbands Pants - Skirts Reinforcement
WOMENS AND MENS WEAR	

CARE INSTRUCTIONS

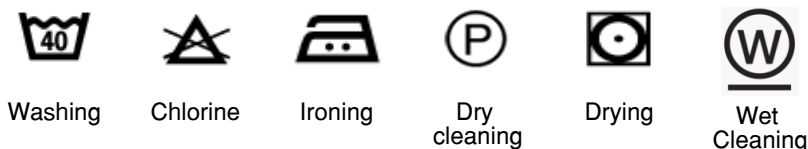

	Fusing Conditions	
 Glueline temperature	121/127 C	121/127 C
 Ironing pressure	200/300 gr/cm	2/3 bar
 Fusing time	12/15 s	12/15 s

In view of the wide variety of existing fabrics and other materials used by the clothing industry, Lainière de Picardie recommends that before industrial use, complete tests are carried out with the fabrics and other materials to be used, and on the machines that will be used. Lainière de Picardie guarantee is, explicitly limited to the replacement of any of its products recognised to be defective, to the exclusion of all other compensation or damages.

