

# CHARGEURS PCC

FASHION TECHNOLOGIES

LADIESWEAR · MENSWEAR · KIDSWEAR · PERFORMANCE · ECO-SOLUTIONS


## 9818/825

**CONSTRUCTION** Thermal  
**COMPOSITION** 100.0 % Polyester  
**COATING** Polyamide - 25 mesh  
**WEIGHT** 25.0 gr/m<sup>2</sup>  
**WIDTH** 150 cms  
**COLOURS** Charcoal (nw) , White  
**DOPE DYED**  
**COLOR DOT**  
**APPLICATION**

WOMENS AND MENS WEAR

Dresses  
Jackets - Blazers  
Pants - Skirts  
Outerwear  
Special washes

### CARE INSTRUCTIONS

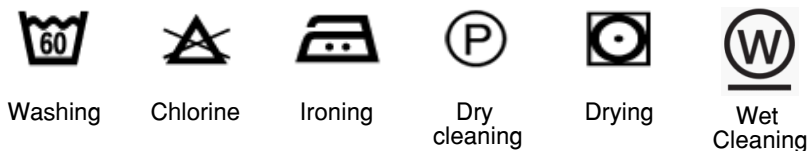

	Fusing Conditions	
 Glueline temperature	127/143 C	127/143 C
	100/300 gr/cm	1/3 bar
	10/15 s	10/15 s

In view of the wide variety of existing fabrics and other materials used by the clothing industry, Lainière de Picardie recommends that before industrial use, complete tests are carried out with the fabrics and other materials to be used, and on the machines that will be used. Lainière de Picardie guarantee is explicitly limited to the replacement of any of its products recognised to be defective, to the exclusion of all other compensation or damages.

